arXiv:1411.4840v2 [physics.soc-ph] 20 Mar 2015

Dual-induced multifractality of human online activity

Yu-Hao Qin[1,2], Zhi-Dan Zhao[1,3], Shi-Min Cai[1,3] and Liang Gao[2]

1 Web Sciences Center, School of Computer Science and Engineering, University of Electronic Science and Technology of China, Chengdu 611731, P. R. China
2 Institute of Systems Science , School of traffic and transportation, Beijing Jiaotong University, Beijing 100044, P. R. China
3 Big Data Research Center, University of Electronic Science and Technology of China, Chengdu 611731, P. R. China

E-mail: shimin.cai81@gmail.com (Shimin Cai) or lianggao@bjtu.edu.cn (Liang Gao)

Abstract. Recent discoveries of human activity reveal the existence of long-term correlation and its relation with the fat-tailed distribution of inter-event times, which imply that there exists the fractality of human activity. However, works further analyzing the category of fractality and its origin still lack. Herein, both the DFA and MFDFA are applied in the analysis of time series of online reviewing activity from Movielens and Netflix. Results show the long-term correlation at individual and whole community level, while the extent of correlation at individual level is restricted to activity level. Such long-term correlation also reveals the fractality of online reviewing activity. In our further investigation of this fractality, we *first* demonstrate it is multifractality, which results from the dual effect of broad probability density function and long-term correlation of time series of online reviewing activity. This result is also verified by three synthesized series. Therefore, we conclude that the combining impact of both broad probability density function and long-term correlation is the origin of multifractality behaving in human online activity.

PACS numbers: 05.45.Tp, 05.45.Df, 89.20.Hh, 89.65.Ef

1. Introduction

Difficulty usually emerges from the characterization and understanding of complex systems, since we cannot split a complex system into several simpler subsystems without tampering its dynamical properties [1]. To address this difficulty, researchers have to turn to analyze their macroscopic properties. Time series analysis is a good case in point because the behavioral evolution of a complex system is characterized by its output records restricted to time scale.

Human activity is deemed as a typical complex system, of which several macroscopic properties have been unveiled recently via time series analysis (e.g., detrended fluctuation analysis, DFA [2, 3, 4]). For examples, the periodicity is found in diverse human activities, such as web surfing [5], online game log-in [6], task submission to linux server [7] and purchasing in E-commerce [8]; the long-term correlation, commonly behaving in many physical, biotic, economic and ecological systems [9, 10, 11, 12, 13, 14, 15, 16, 17], is also discovered in human interactive activity and positively increased with activity level [18].

Following that, Rybski et al. [19] investigate human communication activities in a social network to show the relation between long-term correlation and inter-event clustering. They present that at individual level the long-term correlation in time series of events is strongly dominated by the power-law distribution of inter-event times (named 'Levy correlation' in Ref [19]), while at whole community level, it is a generic property of system since it arises from interdependencies in the activities. Meanwhile, Zhao et al. [20] analyze the time series of inter-event times obtained from online reviewing activities to unveil long-term correlation (i.e., memory property) restricted to activity level. They find that there is an abnormal scaling behavior associated with long-term anticorrelation, which is brought by the bimodal distribution of inter-event times.

These long-term correlations also imply the existence of fractality in time series of human online activity. However, two unanswered questions limits our much deeper recognition of human activity: (1) what category of fractality in time series of human activity and (2) what is the origin of such fractality? To address them, facilitated by the Internet technology, we investigate the time series of human online activity from two movie reviewing websites, Movielends and Netflix. The analysis of long-term correlation is presented to reveal the fractality in time series of the online reviewing activity. At the individual level, we apply DFA on time series of events composed by users with same activity level and the corresponding shuffled ones in which each user preserves inter-event times. The long-term correlations positively increase with activity levels. Moreover, because the distributions of inter-event intervals at different activity levels don't strictly follow a power law, there is a trivial difference between the Hurst exponents [21, 22] of original and shuffled time series. The empirical result is a little different from the finding in human communication activity. At whole community level, the similar analysis on time series of events aggregated from all users' activities show

the stronger long-term correlation with Hurst exponents roughly close to 0.9 and 1.0 for Movielens and Netflix, respectively.

To further obtain the category of such fractality and understand its origin, we use multifractal detrended fluctuation analysis (MFDFA) [23, 24, 25] to probe the singularity spectrum. Dependence between generalized Hurst exponent ($H(q)$) and q-order statistical moments (q) exhibits the multifractality in time series of events at whole community level. Though multifractality still keeps after these time series are randomly shuffled, manifestly changes happen in the value of the generalized Hurst exponent ($H(q)$). A legible result is suggested by the singularity spectrum. We hypothesize that such multifractality forms for the dual effect of broad probability density function (PDF) and long-term correlation [23]. This hypothesis is also verified by our synthesized series. Therefore, we conclude that multifractality exists in human online activity series and the combination impact of broad probability density function and long-term correlation is at the root of such multifractality.

2. Data

Data sets from Movielens and Netflix both record individuals' reviews and markings on movies at a certain time, and are filtered according to the criteria of activity level, $M \geq 55$ (see definition in Sec. 4). We thus finally obtain 26,884 users (38.4% of total users) and 10,000,054 records in a long duration of 4,703 days (nearly 13 years) for Movielens, and 17,703 users (99.6% of total users) and 100,477,917 records in a long duration of 2,243 days (nearly 6 years) for Netflix. As the records in Movielens are almost sampled from its creation date, there are so many noise users. Nevertheless, both the sizes of the filtered users in these two data sets are more than 10^5.

To convert these records into time series of events, we introduce two variables $x(t)$ and $x_{tot}(t)$ which means the events per day of a single user and whole community respectively. These time series serve as the base of our subsequently analysis. A visual illustration is shown in Fig. 1, where (a) and (b) indicate the activity records of two typical users for Movielens and Netflix, respectively, (c) and (d) show corresponding time series of events at individual level, while (e) and (f) represent the time series of events at whole community level. In Fig. 1, we also can observe the clusters of records or events which suggests the existence of burstyness in these online reviewing activities.

3. Method

3.1. Detrended fluctuation analysis

The method of DFA has been proven for usefully revealing the extent of long-term correlation [2, 3, 4], and is less sensitive to the scaling range for the additional detrend process [26]. To keep our description self-contained, we briefly introduce the steps of this method as follows:

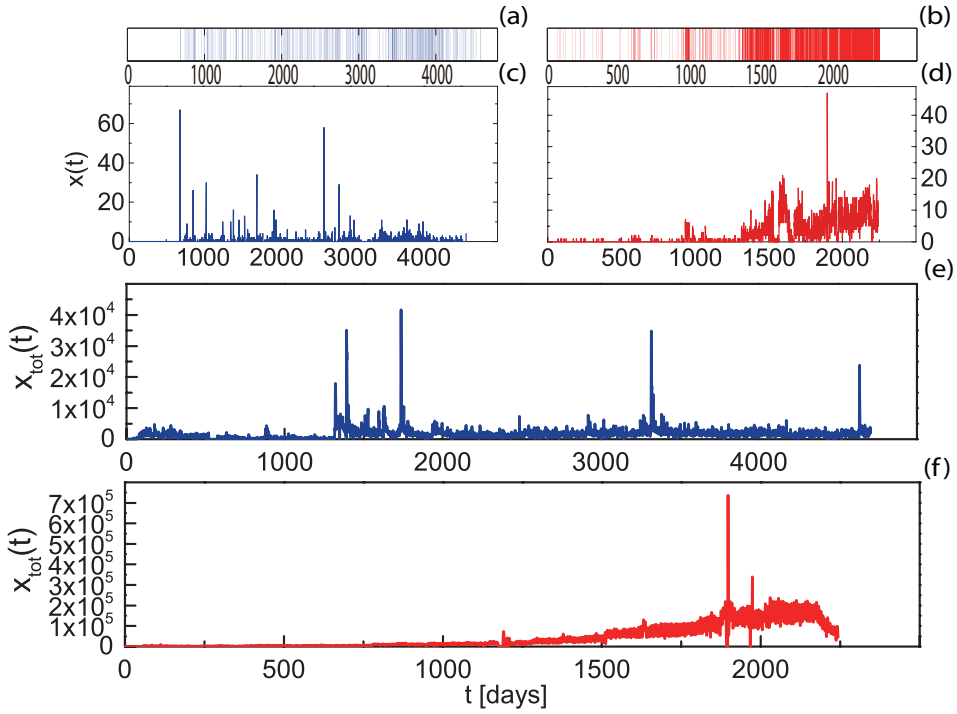

Figure 1. (Color Online) A visual illustration of activity records of typical users and time series of events at individual and whole community levels. (a) and (b) indicate the activity records of two typical users, user23172 ($M = 1308$) and user12228 ($M = 5606$). (c) and (d) show corresponding time series of events for these two typical users. (e) and (f) represent time series of events for whole community. The dark blue and red lines denote Movielens and Netflix, respectively.

i) Calculate the profiles $Y(t')$ of time series $x(t)$,

$$Y(t') = \sum_{t=1}^{t'} x(t) - \langle x(t) \rangle, t' = 1, ..., N \tag{1}$$

ii) Divide $Y(t')$ into s non-overlapping segments with length N_s in an increasing order. Generally, N doesn't exactly equal to the product of s and N_s (i.e., $(N_s = \lfloor \frac{N}{s} \rfloor)$)), suggesting that the last part of $Y(t')$ are missed. Therefore we once divide $Y(t')$ from the opposite direction in order to incorporate whole $Y(t')$. Thus, there are $2N_s$ different segments. Moreover, the value of s is sampled from the logarithmic space, $s = \frac{N}{2^{int(\log_2^N - 2)}}), ..., \frac{N}{2^3}, \frac{N}{2^2}$, which can keep smoothness of curve between $F(s)$ and s.

iii) Given s, the profile $Y(t')$ in each segment is detrended separately. Least-square fit is applied for determining χ^2-functions for each segment, such as for $v = 1, 2, ..., N_s$,

$$F^2(v, s) = \frac{1}{s} \sum_{j=1}^{s} [Y((v-1)s + j) - \omega_v^n]^2, \tag{2}$$

and for $v = N_s + 1, ..., 2N_s$,

$$F^2(v, s) = \frac{1}{s} \sum_{j=1}^{s} [Y((N - v - N_s)s + j) - \omega_v^n]^2 \tag{3}$$

where w_v^n is the n-order polynomial fitting fo segment v.

iv) Calculate the fluctuation function,

$$F(s) = [\frac{1}{2N_s}\sum_{v=1}^{2N_s} F^2(v,s)]^{\frac{1}{2}} \sim s^H, \tag{4}$$

where H is the Hurst exponent. The value of H reveals the extent of long-term correlation in time series. It indicates the long-term anticorrelation for $0 < H < 0.5$, no correlation for $H = 0.5$, and long-term correlation for $H > 0.5$.

3.2. Multifractal detrended fluctuation analysis

DFA helps us to acquire the long-term correlation of time series, thereby ensure its fractality. To further analyze such fractality and its origin, we modify DFA to introduce MFDFA [23, 24, 25], where equation 4 is modified as follows:

$$F(s) = [\frac{1}{2N_s}\sum_{v=1}^{2N_s} [F^2(v,s)]^{q/2}]^{\frac{1}{q}} \sim s^{H(q)}. \tag{5}$$

$H(q)$ is the generalized Hurst exponent. For monofractal time series, $H(q)$ is independent from q, while for multifractal one, $H(q)$ depends on q. In addition, the multifractality of time series may be brought by several key factors, such as long-term correlation and PDF. To figure out the origin of multifractality, we randomly shuffle the time series to reduce the long-term correlation but preserve the same PDF, and applied the MFDFA once again. If the multifractality only results from the PDF, it will be reserved in the shuffled one, while if the multifractality only comes from long-term correlation, it will disappears. If the long-term correlation and PDF dually affect time series, we can expect that the multifractality still keeps but the value of generalized Husrt exponent ($H(q)$) changes.

A much more legible way to characterize a multifractal time series is the singularity spectrum $f(\alpha)$. The horizonal span of $f(\alpha)$ represents the strength of multifractality. Specifically, a very narrow $f(\alpha)$ approximately indicates a monofractal time series, while a wide one suggests a multifractal time series. To acquire its analytical relation with α, we introduce Renyi exponent $\tau(q)$ [27, 28] with the equation given by follows:

$$\tau(q) = qH(q) + 1 \tag{6}$$

Applying the Legendre transformation [29], we finally get the relation between $f(\alpha)$ and α

$$\alpha = \tau'(q) \quad and \quad f(\alpha) = q\alpha - \tau(q) \tag{7}$$

or equivalently (by using (6))

$$\alpha = H(q) + qH'(q) \quad and \quad f(\alpha) = q[\alpha - H(q)] + 1 \tag{8}$$

4. RESULTS

4.1. Long-term correlation in individual activity

To effectively categorize users into different activity levels, we define M_i as the total records of a single user i ($M_i = \sum_{i=1}^{N} x_i(t)$, where N is the length of the series), and convert it into a logarithmic scale, $L_i = \lfloor (\ln M_i) \rfloor$. Then, L ranges from 4 to 8 in Movielens while it increases from 4 to 12 in Netflix. According to logarithmic activity levels, we firstly present the distributions of inter-event times in Fig. 2, where the left and right panels indicate Movielens and Netflix, respectively. As shown in Fig. 2, both of them show a fat tail that suggests the burstiness of online reviewing activity [30]. More concretely, for these users with lower activity levels (e.g. $L < 6$), their inter-event times aren't exactly power law distributed. For example, in Fig. 3, the distributions of inter-event times of users with activity levels $L = 4$ and $L = 5$ in Movielens apparently follow a exponential cut-off power-law distribution via least squared estimating method. While for these users with larger activity levels (e.g. $L > 7$), their inter-event times are approximately power-law distributed. Thus, the power-law distribution is not the only type to characterize the fat tail of inter-event clustering (i.e., burstiness), which is a little different from the empirical result found in human communication activity [19].

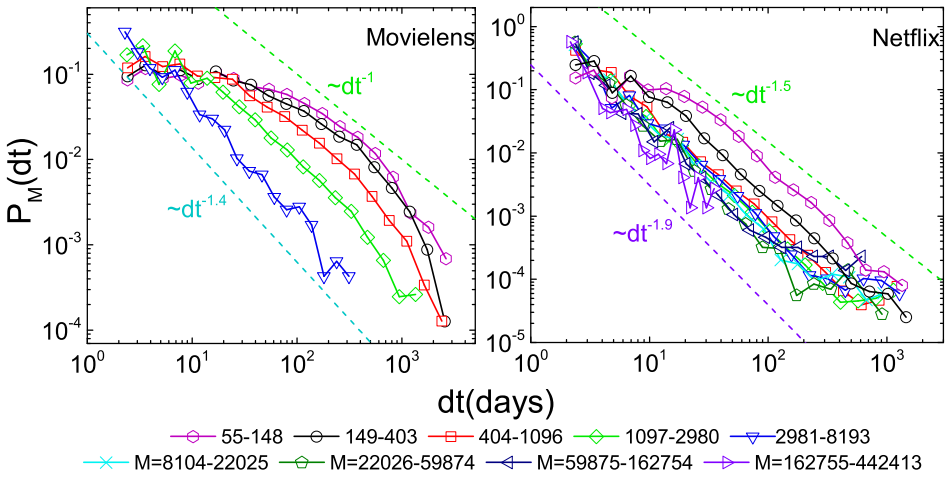

Figure 2. (Color online) Inter-event time distribution at different activity levels. The left and right panels respectively indicate Movielens and Netflix. The dash lines are guide for power-law distributions. The fat tail is both found in inter-event time distributions for Movielens and Netflix, which suggests the burstiness of human online activity.

The burstiness of online reviewing activity (or fat tailed inter-event time distribution) potentially suggests that the time series of events behave long-term correlation [19]. Thus, we apply DFA to calculate the Hurst exponent in each time series of events obtained from a single user. Note that the least square estimating method is applied for fitting trend, and the F-statistic test confirms the significant of

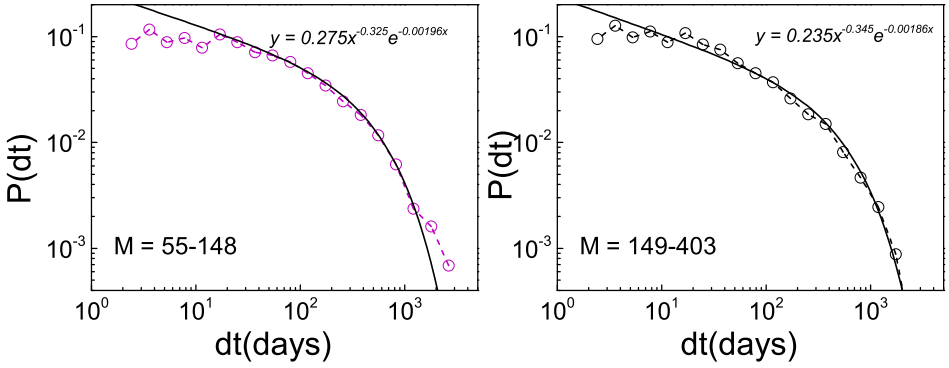

Figure 3. Inter-event time distributions of users in Movielens whose activity levels are respectively $L = 4$ and $L = 5$. Compared with exact power-law distributions, they can be fitted by exponential cut-off power-law distributions via least squared estimating method.

fitting results (see more in Supplementary Materials). Then, these Hurst exponents are further scaled according to the same activity levels of users and averaged. As shown in Fig. 4, the average of Hurst exponents as a function of activity level is presented, whose values are much more than 0.5 that indicates the uncorrelated behavior, and they aren't restricted by order of DFA. Thus, it can be claimed that the long-term correlation exists in these time series of events at individual level. It also worthy to be noted that there is an approximately positive relation between Hurst exponent and activity level both for Movielens and Netflix, similar to those results found in the traded values of stocks and communication activity [32, 33, 19].

Now, we have found that the long-term correlation and fat-tailed inter-event time distribution both exist in Netfilx and Movielens. To further analyze the relation between the long-term correlation and inter-event time distribution, we shuffle the time series of events but preserve the distribution of inter-event times for each user. The procedure is shown as follows: i) extract inter-event times of each user; ii) shuffle the extracted data; iii) keep the first time stamp unchanging and rebuild the time series of events via the shuffled data. The DFA is reused to obtain the Hurst exponents of new time series of events. As shown in Fig. 4, they are trivially different from those of original data, which shows that at individual level the long-term correlation of time series of events associates with the fat-tailed distribution of inter-event times. Since the inter-event times aren't strictly power-law distributed, we cannot simply infer the long-term correlation from Levy correlation [19].

4.2. Long-term correlation in whole community activity

Although the inter-event interval distributions in respect to activity levels show fat tail, we still want to probe whether this property is reserved in whole community (i.e, system). Figure 5 shows that the inter-event time distributions of Movielens and Netflix at whole community level. It can be seen that it is fitted by an exponential cut-

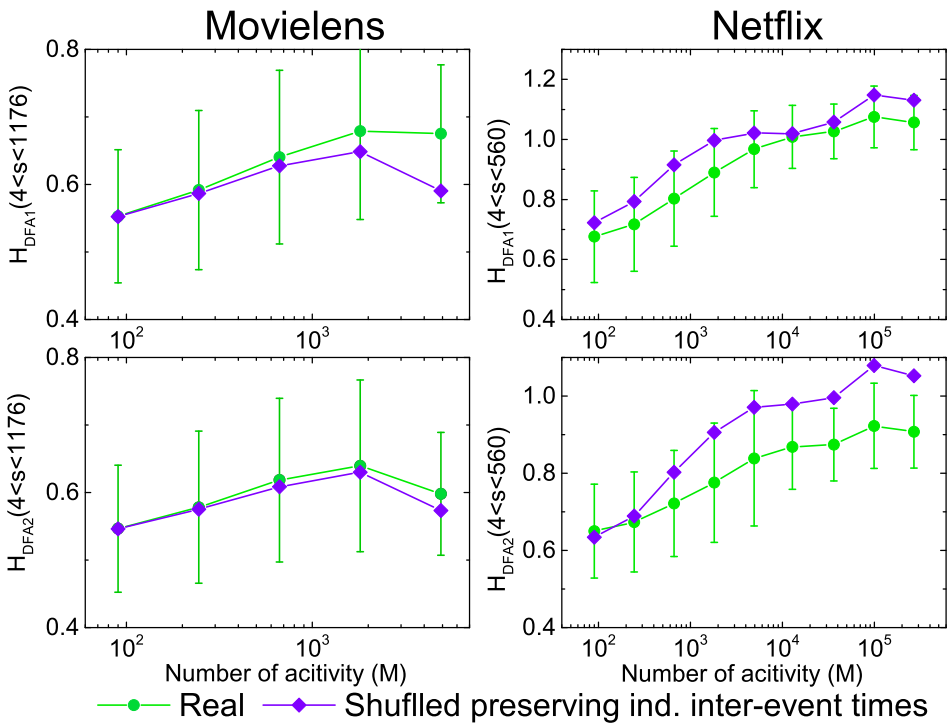

Figure 4. (Color online) Hurst exponents as a function of activity level for Movielens and Netflix. The results obtained from original time series of events and shuffled ones are respectively plotted with green circles and blue square. With the increase of activity levels, the long-term correlation becomes stronger. Moreover, the trivial difference between them reveals the long-term correlation having a potential relation with fat-tailed inter-event time distribution.

off power law distribution for Movielens and approximate power law one for Netflix, which suggests that the fat tail is generic. Furthermore, the events are aggregated from all users in whole community, and the resulting time series is investigated to unveil the long-term correlation. As shown in Fig 6, the Hurst exponents obtained from 1-order and 2-order DFA are robust and approximately close to 0.9 and 1 for Movielens and Netflix, respectively, which shows very strong long-term correlation. These Hurst exponents also associate with the spectrum of time series obeying $\frac{1}{f}$ scaling, suggesting the self-organized criticality of system. Moreover, the time series of events in whole community are shuffled preserving the distribution of inter-event times and find the Hurst exponents reduce into 0.5, which suggests that the long-term correlation in system is due to interdependence in the activity (named 'true correlation' in Ref [19]).

4.3. Multifractality of whole community activity

Long-term correlation shown in individual and whole community activity means the existence of fractality, but few works have further analyzed the category of the fractality and its origin. The results of DFA at whole community level fluctuating at double logarithmic coordination implies the potential multifractality (see in Fig. 6). Inspired

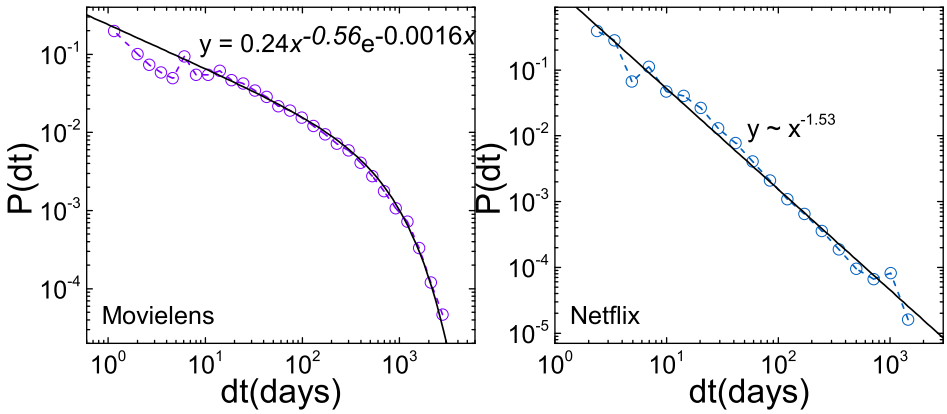

Figure 5. (Color online) Inter-event time distribution at whole community level. The power-law with exponential cut-off relation behaves in Movielens, while power-law relation behaves in Netflix. This result shows the burstiness is generic to system.

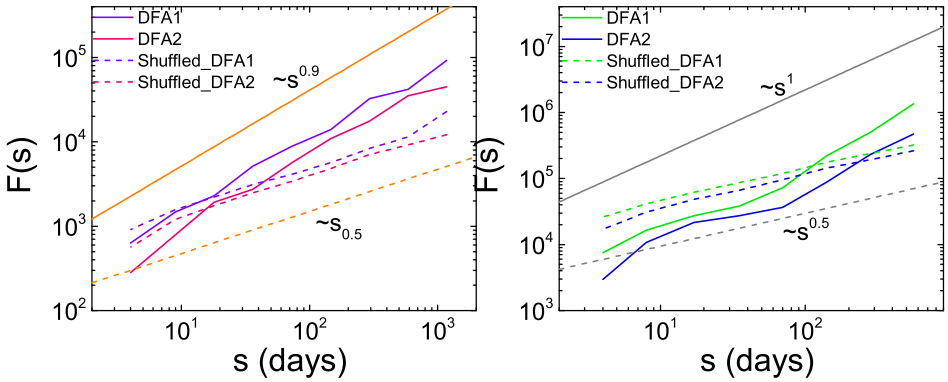

Figure 6. (Color online) The results of 1-order and 2-order DFA for Movielens and Netflix at whole community level. The Hurst exponents of original time series of events obtained via least square estimating method is 0.9 and 1 in Movielens and Netflix respectively. When they are randomly shuffled, the Hurst exponents approximately reduce to 0.5. This result demonstrates that strongly long-term correlation exists in Movielens and Netflix. Note that solid and dash line respectively indicates original time series of events and shuffled one.

by [23], we introduce MFDFA to analyze these data sets and reveal the category of fractality (i.e., monofractality or multifractality).

According to description of method, using 1-order MFDFA, we fix a certain value of q and fit $F_q(\Delta t)$ and Δt at double logarithmic coordination with the least square estimating method to obtain the value of generalized Hurts exponent $H(q)$. Herein, we set q in a interval $(0, 10]$ with step length 0.1. Figure 7 (a) and (b) show the $H(q)$ as a function of q via 1-order MFDFA for Movielens and Netflix, respectively. It can be found that both for Movilens and Netflix $H(q)$ decreases when q increases, that is, the dependence between $H(q)$ and q suggests the multifractality of whole community activity.

To figure out the origin of such multifractality, we randomly shuffle these time

series of events at whole community level and apply 1-order MFDFA once again on the shuffled one. As shown in Fig. 7(c) and (d), the values of $H(q)$ both for Movielens and Netflix obviously reduce in comparison with those of original ones, however, the reminded dependence between $H(q)$ and q still shows the existence of multifractality.

Much more legible results describing the extent of multifractality for Movielens and Netflix are characterized by the singularity spectrum $f(\alpha)$, as shown in Fig. 7(e) and (f). It can be found that the horizon span of $f(\alpha)$ both for the original and shuffled time series of events are almost same, but the large changes only happen to the values of α. It confirms the results of the dependence between $H(q)$ and q, and also suggests that the multifractality of whole community activity is not solely induced by the long-term correlation.

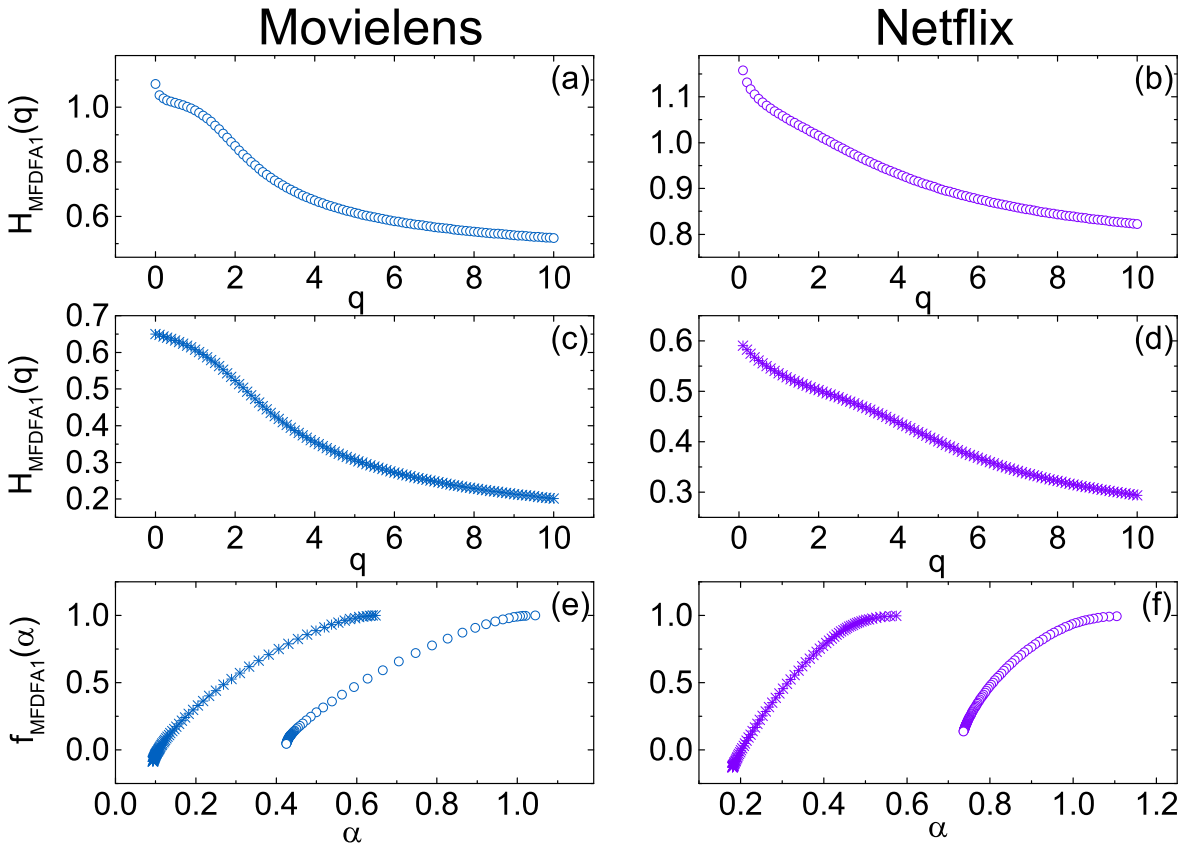

Figure 7. (Color online) Relation between $H(q)$ and q deriving from 1-order MFDFA (a)-(d) and the corresponding singularity spectrum (e) and (f), where (a) and (b) are obtained from the original time series while (c) and (d) are obtained from the shuffled ones. Though the multifractality keeps, there are significant changes happened to the values of H and α. This results reveals the existence of multifractality for Netflix and Movielens and its formation due to the dual effect of long-term correlation and broad PDF and.

So far, we have analyzed the multifractality of human online reviewing activity for Netflix and Movielens, and think that it is induced by the dual effect of the long-term correlation ad broad PDF. To verify such hypothesis, we use three types of synthetic time

series in analogy to real ones and analyze the multifractility of them. More concretely, the first type is a random series obeying a power-law distribution ($y \sim x^{-2}$), the second one is a monofractal series with strong long-term correlation ($H = 0.9$), and the third one is their combination. Their constructions can be found in Appendix. We also obtain the corresponding shuffled time series. Then, the multifractility of them are derived from MFDFA, which are shown in Fig. 8. For the first type of time series in Fig. 8(a) and (d), the remarkable dependence of $H(q)$ and q (or broad singularity spectrum) shows its multifractility dominated by power-law distribution, and the overlaps of results between original and shuffled time series is due to the absence of long-term correlation. While for the second type of time series in Fig. 8(b) and (e), we can find the approximate independence of $H(q)$ and q (or narrow singularity spectrum), which reveals the monofractility. The long-term correlation only affects $H(q)$ approximately changing from 0.9 to 0.5. Finally, for the third type of time series in 8(c) and (f), there exists similar results to empirical findings, which is suggested by the significant horizon span of singularity spectrum and change of $H(q)$. Through aforementioned analysis, we can claim that the multifractality of human online reviewing activity results from the broad PDF and long-term correlation (a more detailed discussion see in Supplementary Materials).

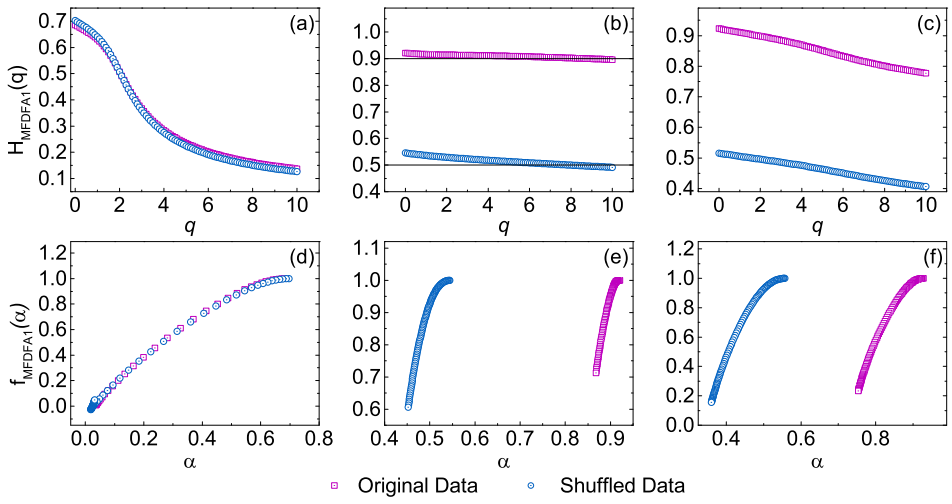

Figure 8. Relation between $H(q)$ and q obtained from 1-order MFDFA (a)-(c) and the corresponding singularity spectrum (d)-(f) of three types of synthetic time series, where pink square and blue circle respectively indicates the results of original and shuffled time series. Note that the first column shows a synthetic time series obeying a power law distribution $y \sim x^{-2}$, the second one describes a synthetic time series whose hurst exponent is 0.9, the third one represents a synthetic time series that combines the properties of the former two time series. Through carefully analyzing them, we can find that only the third time series behaves similar results to empirical findings.

5. Conclusion

At present, we have analyzed data sets of online human reviewing activity from Netfilx and Movielens at individual and the whole community level. At individual level, we find the fat-tailed inter-event time distribution and its relation with the discovered long-term correlation, but we cannot get the exact analytical results like in [19] for the fact that these inter-event time distributions in restricted to activity level don't strictly follow a power-law behavior. Meanwhile, at the whole community level, we also find several similar properties as what we find at individual level, but the long-term correlation is due to interdependence in whole community activity. In further, these long-term correlation characterized by the Hurst exponent derived from DFA potentially imply there exists the fractality of human online reviewing activity.

To further uncover the category of such fractality and its origination, we introduce MFDFA and finally find the multifractality of whole community activity. A hypothesis that such multifractality results from the combining impact of broad PDF and long-term correlation is provided. Then, it is verified by analyzing three types of synthetic time series having one or more properties of real one. Thus, we can conclude that a dual-induced multifractility exists in online human activity. Nevertheless, it shouldn't be ignored that an appropriate model lacking to explain the mechanism of reproducing such time series. We hope that future work will solve this problem.

Acknowledge

We thank the financial support from the Major State Basic Research Development Program of China (973 Program) (Grant No. 2012CB725400) and the National Natural Science Foundation of China (Grant Nos. 71101009, 71131001, 91324002).

Appendix

We present the construction of three types of synthetic time series. Concretely speaking, we first synthesize a random time series $x(t)$ that obeys a power-law distribution $p(x) = \beta x^{-(1+\beta)}$. According to central limit theorem, it can be generated as follows:

$$x(t) = (r(t)/\beta)^{-\frac{1}{1+\beta}}, \tag{9}$$

where $r(t)$ is a time series sampled from a uniform distribution $U(0, 1)$. In our analysis, we set $\beta = 1$, which leads to $x(t)$ obeying a power-law distribution, $p(x) = x^{-2}$).

Then, we apply the FFM method proposed in [34] to generate a monofractal time series with long-term correlation, and the procedure is shortly introduced as follows:

i) Generate a 1-dimension random time series U_i following a Gaussian distribution, and derive its fourier transform coefficients U_q.

ii) Obtain S_q from the Fourier transformation of C_l, where $C_l = \langle \mu_i \mu_{i+l} \rangle = (1 + l^2)^{-\gamma/2}$.

iii) Calculate $N_q = [S_q]^{1/2} U_q$.

iv) Derive our desired time series N_r via the inverse fourier transformation of N_q. Herein, we can transform N_r via $N_r = N_r - min(N_r) + 1$.

At last, we provide a method to combine these two time series for synthesizing the third time series,

$$X(t) = (N_r(t)/\beta)^{-\frac{1}{1+\beta}} \tag{10}$$

where N_r is the time series with long-term correlation.

Reference

[1] Kantelhardt J W 2009 *Encyclopedia of Complexity and Systems Science: Fractal and multifractal time series* (Springer) pp 3754-3779

[2] Bunde A, Havlin S, Kantelhardt J W, Penzel T, Peter J H and Voigt K 2000 *Phys. Rev. Lett.* **85** 3736

[3] Peng C K, Buldyrev S V, Havlin S, Simons M, Stanley H E and Goldberger A L 1994 *Phys. Rev. E* **49** 1685

[4] Kantelhardt J W, Koscielny-Bunde E, Rego H H, Havlin S and Bunde A 2001 *Physica A* **295** 441

[5] Gonçalves B and Ramasco J J 2008 *Phys. Rev. E* **78** 026123

[6] Jiang Z Q, Ren F, Gu G F, Tan Q Z and Zhou W X 2010 *Physica A* **389** 807

[7] Baek S K, Kim T Y and Kim B J 2008 *Physica A* **387** 3660

[8] Dong Y W, Cai S M and Shang M S 2013 *Acta Phys. Sin.* **62** 028901

[9] Peng C K, Buldyrev S, Goldberger A, Havlin S, Sciortino F, Simons M, Stanley H E 1992 *Nature* **356** 168

[10] Peng C K, Mietus J, Hausdorff J, Havlin S, Stanley H E and Goldberger A 1993 *Phys. Rev. Lett.* **70** 1343

[11] Koscielny-Bunde E, Bunde A, Havlin S, Roman H E, Goldreich Y and Schellnhuber H J 1998 *Phys. Rev. Lett.* **81** 729

[12] Makse H A, Havlin S and Stanley H E 1995 *Nature* **377** 19

[13] Makse H A, Andrade J S, Batty M, Havlin S, Stanley H E 1998 *Phys. Rev. E* **58** 7054

[14] Liu H Y, Gopikrishnan P, Cizeau P, Meyer M, Peng C K and Stanley H E 1999 *Phys. Rev. E* **60** 1390

[15] Cai S M, Zhou P L, Yang H J, Yang C X, Wang B H and Zhou T 2006 *Chin. Phys. Lett.* **23** 754

[16] Cai S M, Fu Z Q, Zhou T, Gu J and Zhou P L 2009 *Europhys. Lett.* **87** 68001

[17] Rozenfeld H D, Rybski D, Andrade J S, Batty M, Stanley H E and Makse H A 2008 *Proc. Natl. Acad. Sci. USA* **105** 18702

[18] Rybski D, Buldyrev S V, Havlin S, Liljeros F and Makse H A 2009 *Proc. Natl. Acad. Sci. USA* **106** 12640

[19] Rybski D, Buldyrev S V, Havlin S, Liljeros F and Makse H A 2012 *Sci. Rep.* **2** 560

[20] Zhao Z D, Cai S M, Huang J, Fu Y and Zhou T 2012 *Europhys. Lett.* **100** 48004

[21] Hurst H E 1951 *Trans. Amer. Soc. Civil. Eng.* **116** 770

[22] Hurst H E 1956 *ICE Proceedings*(Thomas Telford) **5** 519

[23] Kantelhardt J W, Zschiegner S A, Koscielny-Bunde E, Havlin S, Bunde A and Stanley H E 2002 *Physica A* **316** 87

[24] Movahed M S, Jafari G, Ghasemi F, Rahvar S and Tabar M R R 2006 *J. Stat. Mech.* **2006** P02003

[25] Lim G, Kim S, Lee H, Kim K and Lee D I 2007 *Physica A* **386** 259

[26] Shao Y H, Gu G F, Jiang Z Q, Zhou W X and Sornette D 2012 *Sci. Rep.* **2** 835

[27] Meakin P 1987 *Advances in Colloid and Interface science* **28** 249

[28] Peitgen H O, Jürgens H and Saupe D 2004 *Chaos and fractals: new frontiers of science* (Springer)

[29] Tulczyjew W M 1977 *Annales de l'institut Henri Poincaré (A) Physique théorique* (Gauthier-villars) **27** 101

[30] Barabasi A L 2005 *Nature* **435** 207
[31] Buldyrev S V, Goldberger A L , Havlin S, Peng C K , Simons M and Stanley H E 1993 *Phys. Rev. E* **47** 4514
[32] Eisler Z and Kertész J 2006 *Phys. Rev. E* **73** 046109
[33] Eisler Z, bartos I and Kertész J 2006 *Adv. Phys.* **57** 89
[34] Makse H A, Havlin S, Schwartz M and Stanley H E 1996 *Phys. Rev. E* **53** 5445